


## Integral Motor Bracket Installation Note

The integral motor bracket can be mounted to the motor rosette in either of two orientations as shown in the pictures below. This allows the bracket locking handle to face outward.

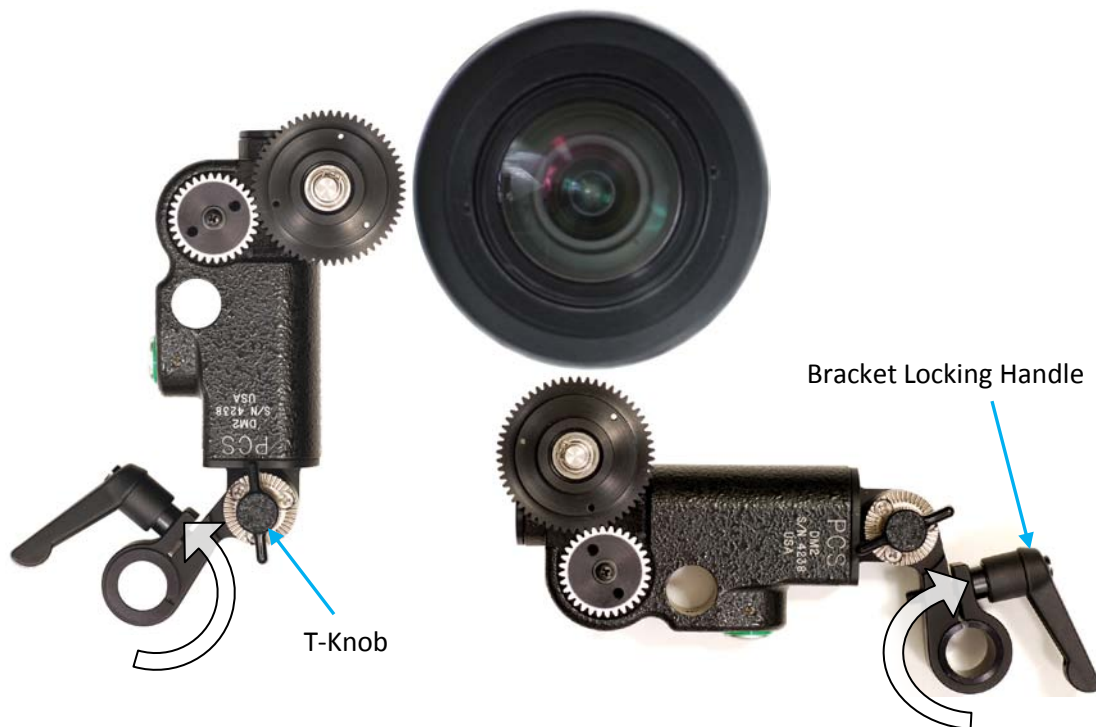

As the locking handle is tightened, the bracket will move slightly in the direction indicated by the arrows. To avoid creating backlash between the motor and lens:

1. Place the motor in the desired position with the T-knob loose, about  $\frac{1}{2}$  turn from locked.
2. While holding the motor against the lens with light pressure, tighten the bracket locking handle.
3. Tighten the T-handle.